


ultra lavatory faucet GM20, chrome, IR-sensor, mains operation exposed, without drain assembly, no temp. mixing, PUBLIC, G3/8

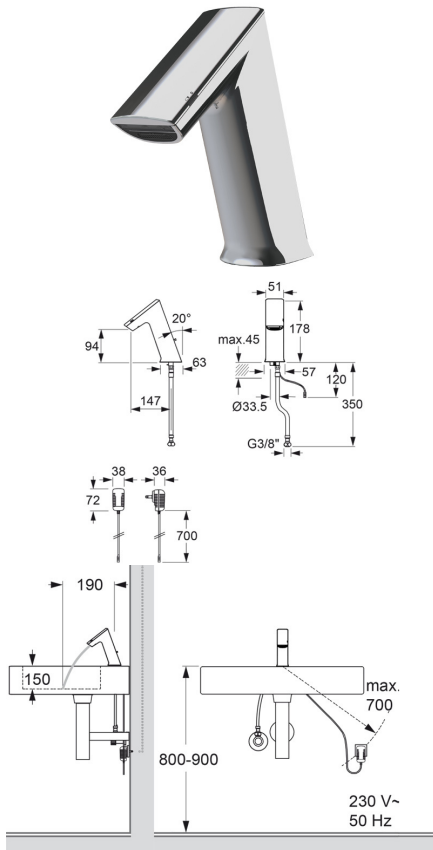

ultra lavatory faucet GM20 PUBLIC, with IR sensor, without temperaturemixing (for cold or premixed water), chromed

Touchless, electronically controlled lavatory faucet:

- For connection to cold or premixed water
- Modular single-piece design without separate installation box, sturdy metal housing, chromed
- Reliable solenoid valve ROBUST (minimal level of water pressure surge)
- Dual infrared sensors (with automatic setting feature), microprocessor
- Vandal-resistant aerator (replaceable with integrated tool)
- Cold water supply connection with flexible hose
- Built-in filter
- TwistStop: integrated automatic shut-off for facilitate replacing or cleaning the filter (no shut-off to angle valves required)
- One Tool Service / all system parts accessible from above
- 12 or 24-hour hygienic flush activatable with Touch
- Compatible with CNX and Service APP: control of stored operational data, settings and control functions
- Compatible with Service APP: Control of stored operational data, settings and control functions

Optional:

Valve unit with multi laminar spray head 1,9 l/min (see accessories)

Notice:

When integrated into the CNX Water Management System, the CNX Converter 6 V must be ordered separately.

When using the Service APP, the BLE Converter must be ordered separately.

Attributes:

Nominal connection width: G3/8,

Electronics module: PUBLIC, electronic unit in robust metal housing

Use: IR-sensor, contact-free activation

Mixture: No temp. mixing, for cold or premixed water

Power supply: Mains operation exposed, mains power supply 230/6V

Drain assembly: Without drain assembly,

Colour: Chrome,

Sorting: 546,

Technical Data:

Mains supply: Plug-in transformer 110-240 V 50/60 Hz / 6 V
Operating pressure: 0,3 - 10 bar
Water temperature (max.): 80 °C
Flow rate: Approx. 5,7 l/min (3 bar)
Follow-up time: 1 s pre-set (adjustable with Touch 0-10 s)
Continuous water flow and hygienic flush time: 2 min pre-set
(adjustable with Touch 0,5-20 min)
Temporary-off: 2 min. (fixed)
Sensor sensitivity: Automatic self-adapting sensor technology
Built-in filters: 0,5 mm mesh size
Aerator: Aerator RC
Flexible hose: 350 mm
Angle valve connection: G 3/8"
Engineering standards: DIN EN 200; CE